
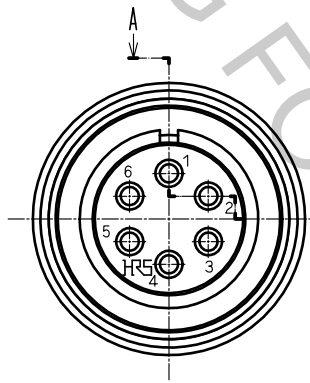


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

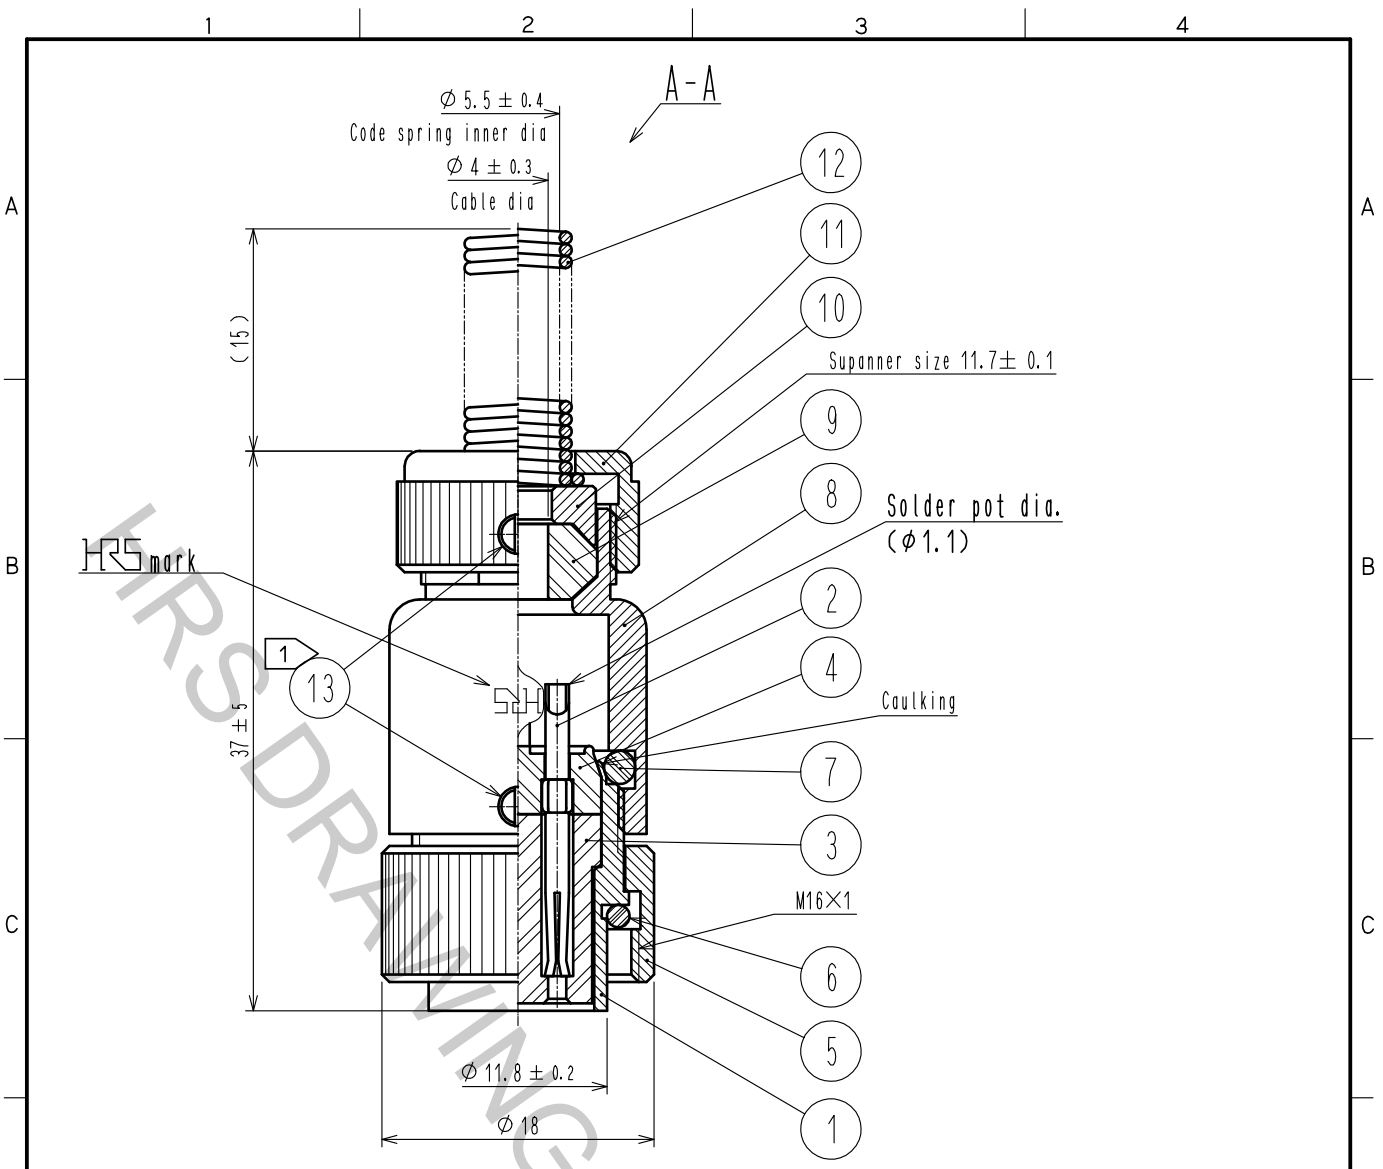

Notes ① The recommended clamp torque of ref. No. ⑬ : 2 to 3 N · m.
 LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent from loosening.
 ② The rotation of ref. No. ⑧ and ref. No. ① to ref. No. ① is shown.
 ③ The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure.
 Please confirm before the use.

6	CHLOROPRENE RUBBER	(BLACK)	13	BRASS	NICKEL PLATING
5	BRASS	NICKEL PLATING	12	PHOSPHOR BRONZE	NICKEL PLATING
4	PPS	(BLACK) UL94V-0	11	BRASS	NICKEL PLATING
3	PPS	(BLACK) UL94V-0	10	BRASS	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5 μm min.	9	CHLOROPRENE RUBBER	(BLACK)
1	BRASS	NICKEL PLATING	8	BRASS	NICKEL PLATING
			7	CHLOROPRENE RUBBER	(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI 18. 02. 22	DRAWING NO.	EDC-008307-31-00			
		CHECKED : HY. KOBAYASHI 18. 02. 22	PART NO.	RM12WTPE-6S-(4)(31)			
		DESIGNED : HY. KISHI 18. 02. 21	CODE NO.	CL109-1092-0-31			
		DRAWN : MK. INOUE 18. 02. 07					1/1