


A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

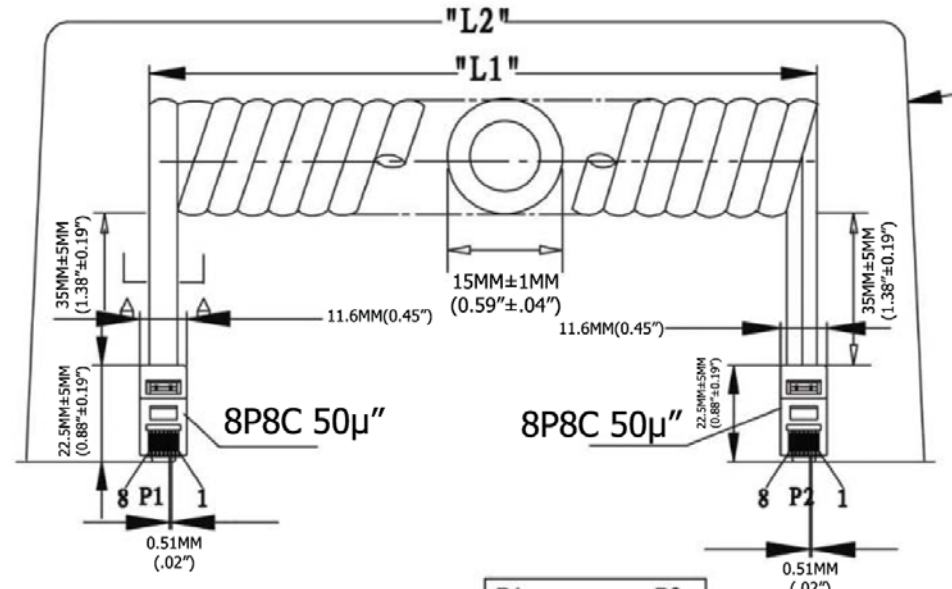


Extended length is with 500g of force

**Material:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

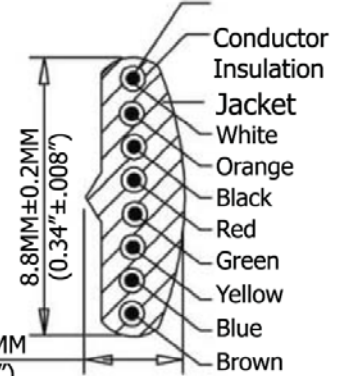

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345 Inches	126.0 Inches
7,620.0MM-8,763.0MM	3,200.4MM

SEC: A-A



Scale	1:1					Name	Item No. <b>AT-C-26-8/8/W-25/R</b>
TOLERANCE				Drawn	11.02.11	Chappell	
X.X	±0.40			Approved			Title NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Reverse Plug, 50µ" of contact plating, WHITE
X.XX	±0.25						
X.XXX	±0.15						Drawing No.
Angle	±3°						<b>rev00</b>
							Replace
							Sheet

