

# "High Frequency Ceramic Solutions"

Preliminary

## 2.5 GHz Low Pass Filter

P/N 2500LP14A0400

Detail Specification: 12/02/08

Page 1 of 2

### General Specifications

Part Number	2500LP14A0400
Frequency (MHz)	2300 - 2700
Insertion Loss	0.55 dB max.
Return Loss	11.7 dB min.
Attenuation (min.)	35 dB @ 2 x fo
Attenuation (min.)	25 dB @ 3 x fo

Impedance	50 Ω
Reel Quantity	4,000
Input Power	2 Watts max.
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity: 45-75%RH, 12 mos. Max



Termination Style	100% Tin	Suffix = "None"	eg. 2500LP14A0400
	Tin / Lead	Suffix = "/Pb"	eg. 2500LP14A0400/Pb

### Terminal Configuration

No.	Function
1	GND
2	IN
3	GND
4	GND
5	OUT
6	GND

### Mechanical Dimensions

	In	mm
L	0.063 ± 0.004	1.60 ± 0.10
W	0.031 ± 0.004	0.80 ± 0.10
T	0.024 ± 0.004	0.60 ± 0.10
a	0.008 ± 0.004	0.20 ± 0.10
b	0.008 +.004/-0.006	0.20 +0.1/-0.15
c	0.006 ± 0.004	0.15 ± 0.10
g	0.012 ± 0.004	0.30 ± 0.10
p	0.020 ± 0.002	0.50 ± 0.05

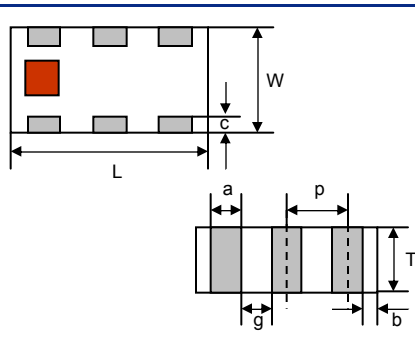


### Mounting Considerations

Mount these devices with brown mark facing up.

\* Line width should be designed to provide 50 Ω impedance matching characteristics, depending on PCB material and thickness.

\*\* DC Blocking capacitor is connected in series at each In/Out Port.

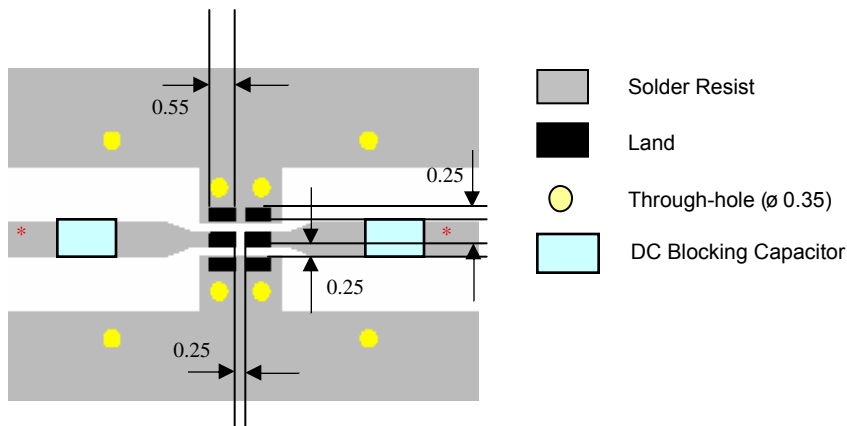

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechology.com](http://www.johansontechology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"

Preliminary


2.5 GHz Low Pass Filter

P/N 2500LP14A0400

Detail Specification: 12/02/08

Page 2 of 2

Typical Electrical Performance (T=25°C)

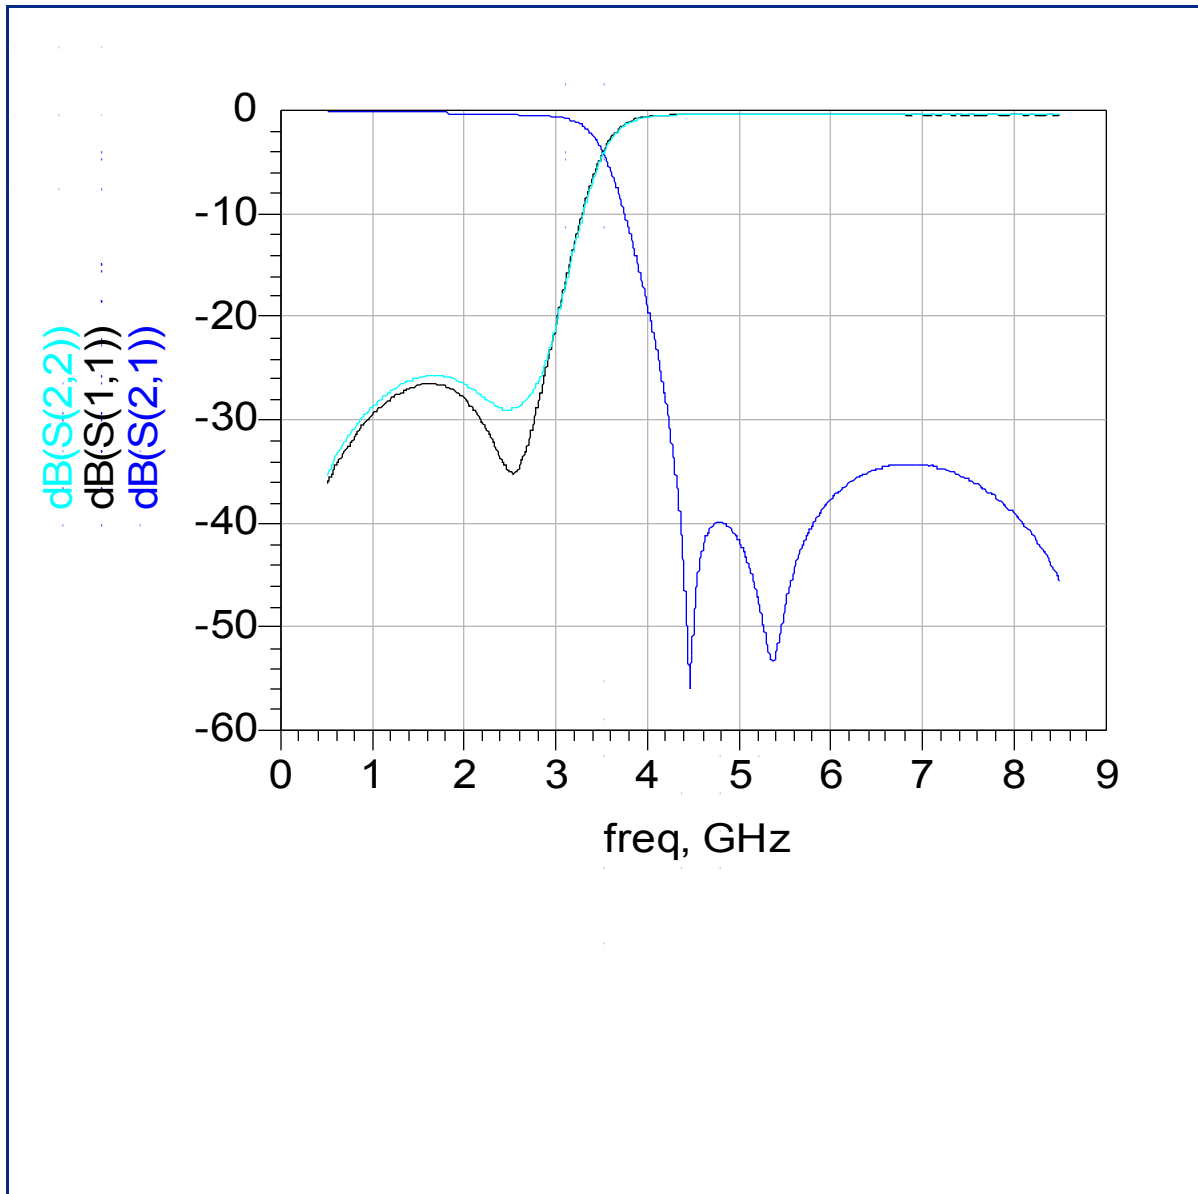

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved