SEIKO EPSON CORPORATION

CRYSTAL OSCILLATOR (SPXO) OUTPUT : CMOS

SG-210 STF

- •Frequency range
- •Supply voltage
- 1.6 V to 3.6 V 1
- Function •External dimensions
- : Standby(ST)

: 1 MHz to 75 MHz

- •Operation temperature : -40 to +105 °C
- : 2.5 × 2.0 × 0.8 mm



Specifications (characteristics)


Item	Symbol	Specifications			Conditions / Remarks
Output frequency range	fo	1MHz to 75MHz			Please contact us about available frequencies.
· · · · · ·	Vcc	1.6V to 3.6V			·
Supply voltage		1.8 V Typ.	2.5 V Typ.	3.3 V Typ.	
		1.6 V to 2.2 V	2.2 V to 3.0 V	2.7 V to 3.6 V	
Storage temperature	T_stg	-40 °C to +125 ℃			Storage as single product.
Operating temperature	T_use	-40 °C to +85 ℃ / -40 °C to +105 ℃			
Frequency tolerance	f_tol	S: ±25 × 10 ⁻⁶			-20 °C to +70 °C
		L:±50 × 10 ⁻⁶			-40 °C to +85 °C
		$Y:\pm 50 \times 10^{-6}, W:\pm 100 \times 10^{-6}$			-40 °C to +105 °C
	lcc	1.5 mA Max.	1.6 mA Max.	1.8 mA Max.	No load condition 1MHz <fo≤20mhz< td=""></fo≤20mhz<>
Current consumption		1.8 mA Max.	2.0 mA Max.	2.2 mA Max.	No load condition 20MHz <fo≤40mhz< td=""></fo≤40mhz<>
		2.1 mA Max.	2.4 mA Max.	2.6 mA Max.	No load condition 40MHz <fo≤60mhz< td=""></fo≤60mhz<>
		2.4 mA Max.	2.8 mA Max.	3.0 mA Max.	No load condition 60MHz <fo≤75mhz< td=""></fo≤75mhz<>
Stand-by current	I_std	2.1 µA Max.	2.5 µA Max.	2.7 µA Max.	ST =GND
Symmetry	SYM	45 % to 55 %			50 % Vcc level L_CMOS ≤ 15 pF
Output voltage	Vон	Vcc-0.4V Min.			
	Vol	0.4V Max.			
Output load condition (CMOS)	L_CMOS	15 pF Max.			
Input voltage	Vін	80 % Vcc Min.			ST terminal
	VIL	20 % Vcc Max.			
Rise time and Fall time	tr/ tf	4 ns Max. 3 ns Max.			20 % Vcc to 80 % Vcc level,L_CMOS=15 pF
Start-up time	t_str	3 ms Max.			t=0 at 90 % Vcc+85°C,(+105 °C.)
Frequency aging	f_aging	$\pm 3 imes 10^{-6}$ / year Max.			+25 °C, First year, V cc=1.8 V, 2.5 V, 3.3 V
Phase noise	C/N	-145 dBc/Hz Typ.			@1kHz,fo=48MHz
		-158 dBc/Hz Typ.			@100kHz ,fo=48MHz
		-161 dBc/Hz Typ.			@Floor Lv.

Product Name (Standard form) <u>SG-210 S T F 25.000000MHz L</u> ① ②③ ④ ⑤ Model ③Supply voltage ④Frequency

③Supply voltage Т 1.6 to 3.6 V


GND OUT

Vcc

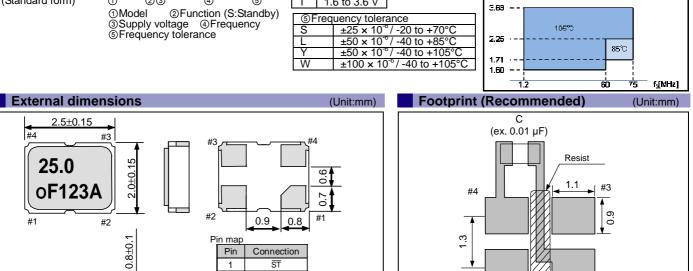

2 3 4 Note ST pin = HIGH or "open" : Specified frequency output.

ST pin = LOW : Output is high impedance, oscillation stops.



#1

#2

%1 : Maximum T_use of operating range

Yœ[**∕**]

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

Explanation of the mark that are using it for the catalog

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

Pb Free	► Pb free.
RoHS	 Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
For Automotive	► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
Automotive Safety	► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
 The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and
 regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of
 weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to
 any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
 / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, use etc.) / Madient intervented to a surface equipment (artificial satellites).
 - vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.