

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0603 X7R 33nF 16V(0603B333K160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @16V, 120sec)

Item	Spec
Cap [nF]	33(±10%)
DF	≤ 3.5%
IR [G-ohm]	> 10


3. Impedance/ESR-Frequency

(Equipment: 4294A)

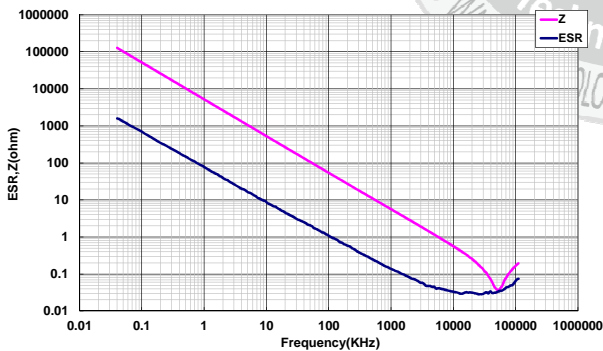

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

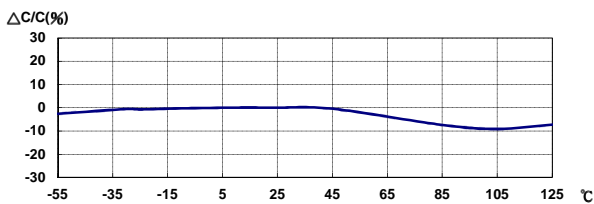

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

8V : -2.23% ; 16V : -10.60%

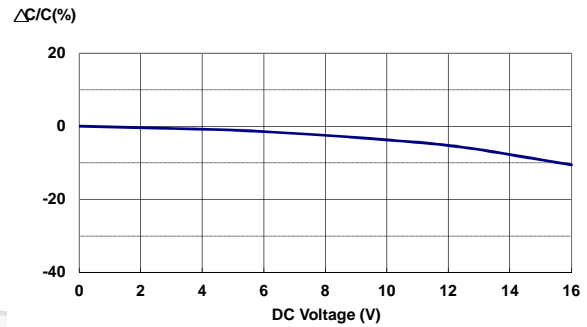

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

