

## Feed-through header - PCV 6-16/ 5-GF-10,16 - 1922598

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB headers, number of positions: 5, pitch: 10.16 mm, color: green, contact surface: Silver, mounting: Wave soldering, The nominal current of 76 A applies in connection with connectors from the PC 16 family. 41 A are reached in connection with PC 6 connectors (50 A in accordance with UL).


The figure shows a 6-position version

### Why buy this product

- Well-known mounting principle allows worldwide use
- Screwable flange for superior mechanical stability
- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

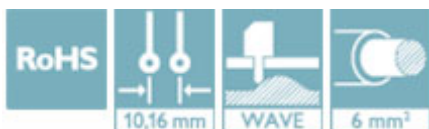

### Key Commercial Data

Packing unit	50 STK
GTIN	 4 017918 727024
GTIN	4017918727024

### Technical data

#### Dimensions

Length [ l ]	13.4 mm
Width	68.56 mm
Pitch	10.16 mm
Dimension a	40.64 mm
Width [ w ]	68.56 mm
Height [ h ]	33 mm
Constructional height	29 mm
Length of the solder pin	4 mm
Length	13.4 mm

#### General

Range of articles	PCV 6-16/...-GF
-------------------	-----------------

# Feed-through header - PCV 6-16/ 5-GF-10,16 - 1922598

## Technical data

### General

Color	green
Number of positions	5

### Standards and Regulations


Connection in acc. with standard	CUL
----------------------------------	-----

### Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Drilling diagram

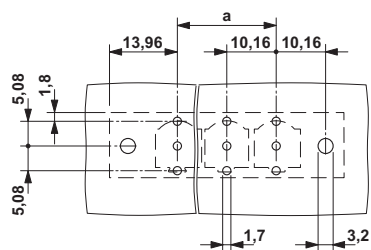

Dimensional drawing

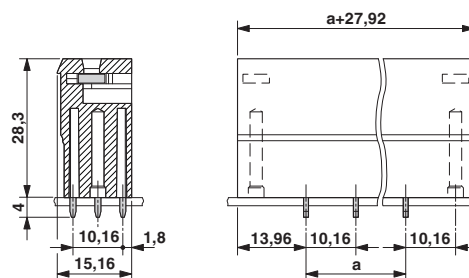

## Approvals

### Approvals

#### Approvals

SEV / IECCE CB Scheme / EAC / cULus Recognized


#### Ex Approvals


### Approval details


SEV		<a href="https://www.electrosuisse.ch/en/meta/shop/product-certificates.html">https://www.electrosuisse.ch/en/meta/shop/product-certificates.html</a>	IK-3431
Nominal voltage UN	1000 V		
Nominal current IN	76 A		

# Feed-through header - PCV 6-16/ 5-GF-10,16 - 1922598

## Approvals

IECEE CB Scheme		<a href="http://www.iecee.org/">http://www.iecee.org/</a>	CH-8077
Nominal voltage UN	1000 V		
Nominal current IN	76 A		

EAC		B.01742
-----	-----------------------------------------------------------------------------------	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-20040202
	D	B	C
Nominal voltage UN	600 V	300 V	300 V
Nominal current IN	5 A	66 A	66 A

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>