




PCB LAYOUT



SCHEMATIC

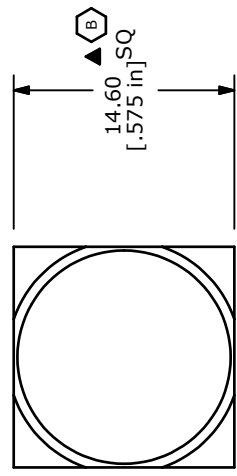

CLEAR CAP WITH WHITE DIFFUSER

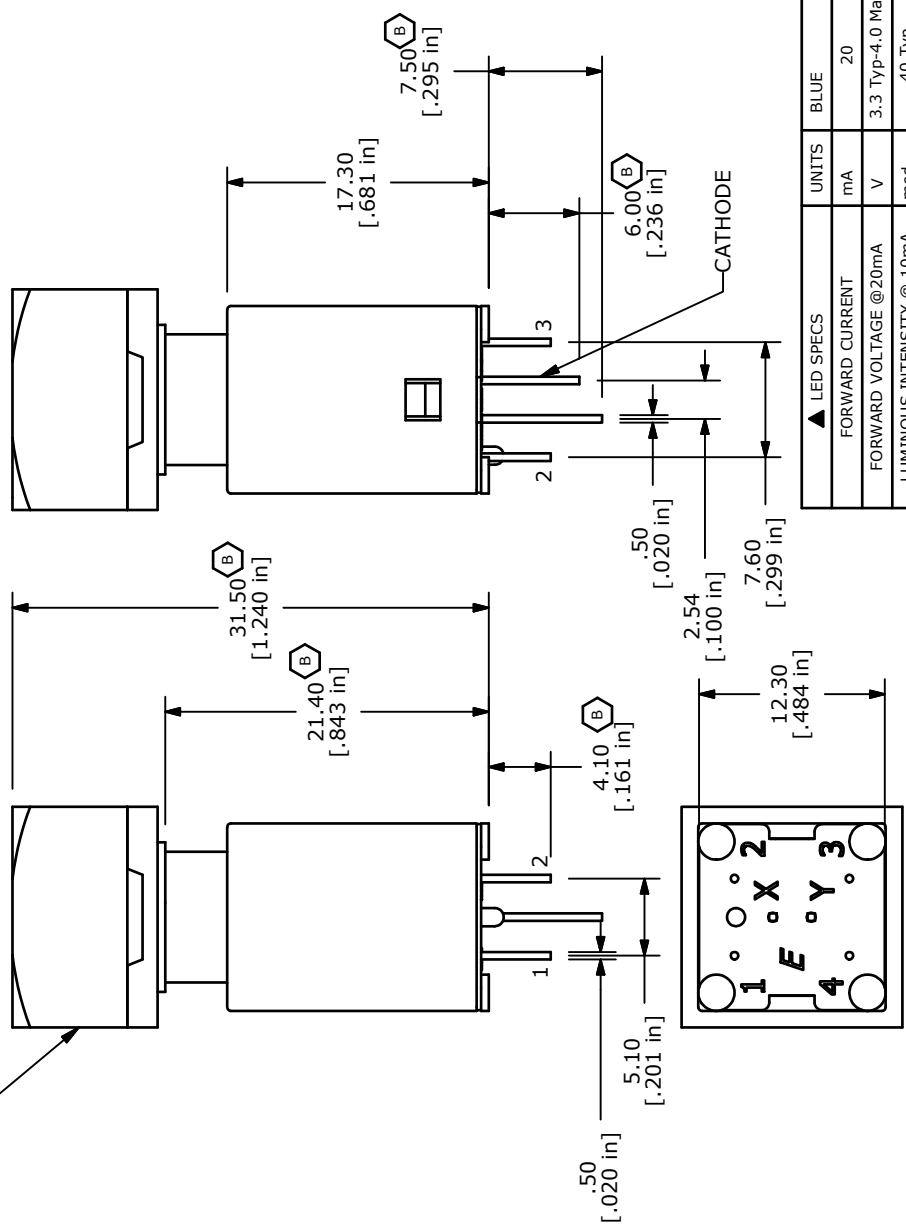

TITLE LP160A1BSTWB

SCALE	2:1	DATE	7/30/2010	DR	rc	DWG	B160003	REV	B
-------	-----	------	-----------	----	----	-----	---------	-----	---

▲ LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	3.3 Typ-4.0 Max
LUMINOUS INTENSITY @ .10mA	mcd	40 Typ

- NOTES:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X±0.4
X.XX±0.25
 - TERM. NOS. FOR REFERENCE ONLY.
 - RATING: 20VDC, 100mA MAX; SPST
 - CONTACT RESISTANCE: 150 MILLI-OHM MAX.
 - INSULATION RESISTANCE: 10MEGA-OHM MIN @500VDC.
 - DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
 - OPERATING FORCE: 250±x50GF
 - OPERATING LIFE: 50,000,000 CYCLES
 - OPERATING TEMP: -5°C TO +60°C
 - STORAGE TEMPERATURE: -40°C TO +90°C
 - TOTAL TRAVEL: 3.30mm±0.3
 - ▲13. TRAVEL TO ELECTRICAL MAKE: 2.9 ±0.5MM
 - ▲14. LED COLOR: BLUE
 - 2002/95/EC (ROHS) COMPLIANT
 - ▲ DENOTES CRITICAL PARAMETER.

REV	PCR NO	DESCRIPTION	DATE	BY
B	19592	CHANGE DIMS	1/17/11	BGL
A	19259	New Release	8/20/10	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED