
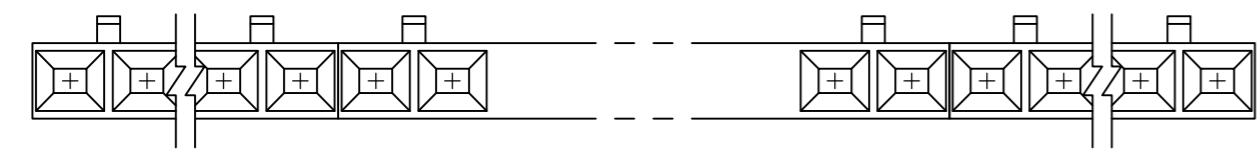


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	EC 0G3C 0771 04	29DEC04	BSV	JLG
	M1	REVISED PER ECO-09-020689	01SEP09	KK	AEG

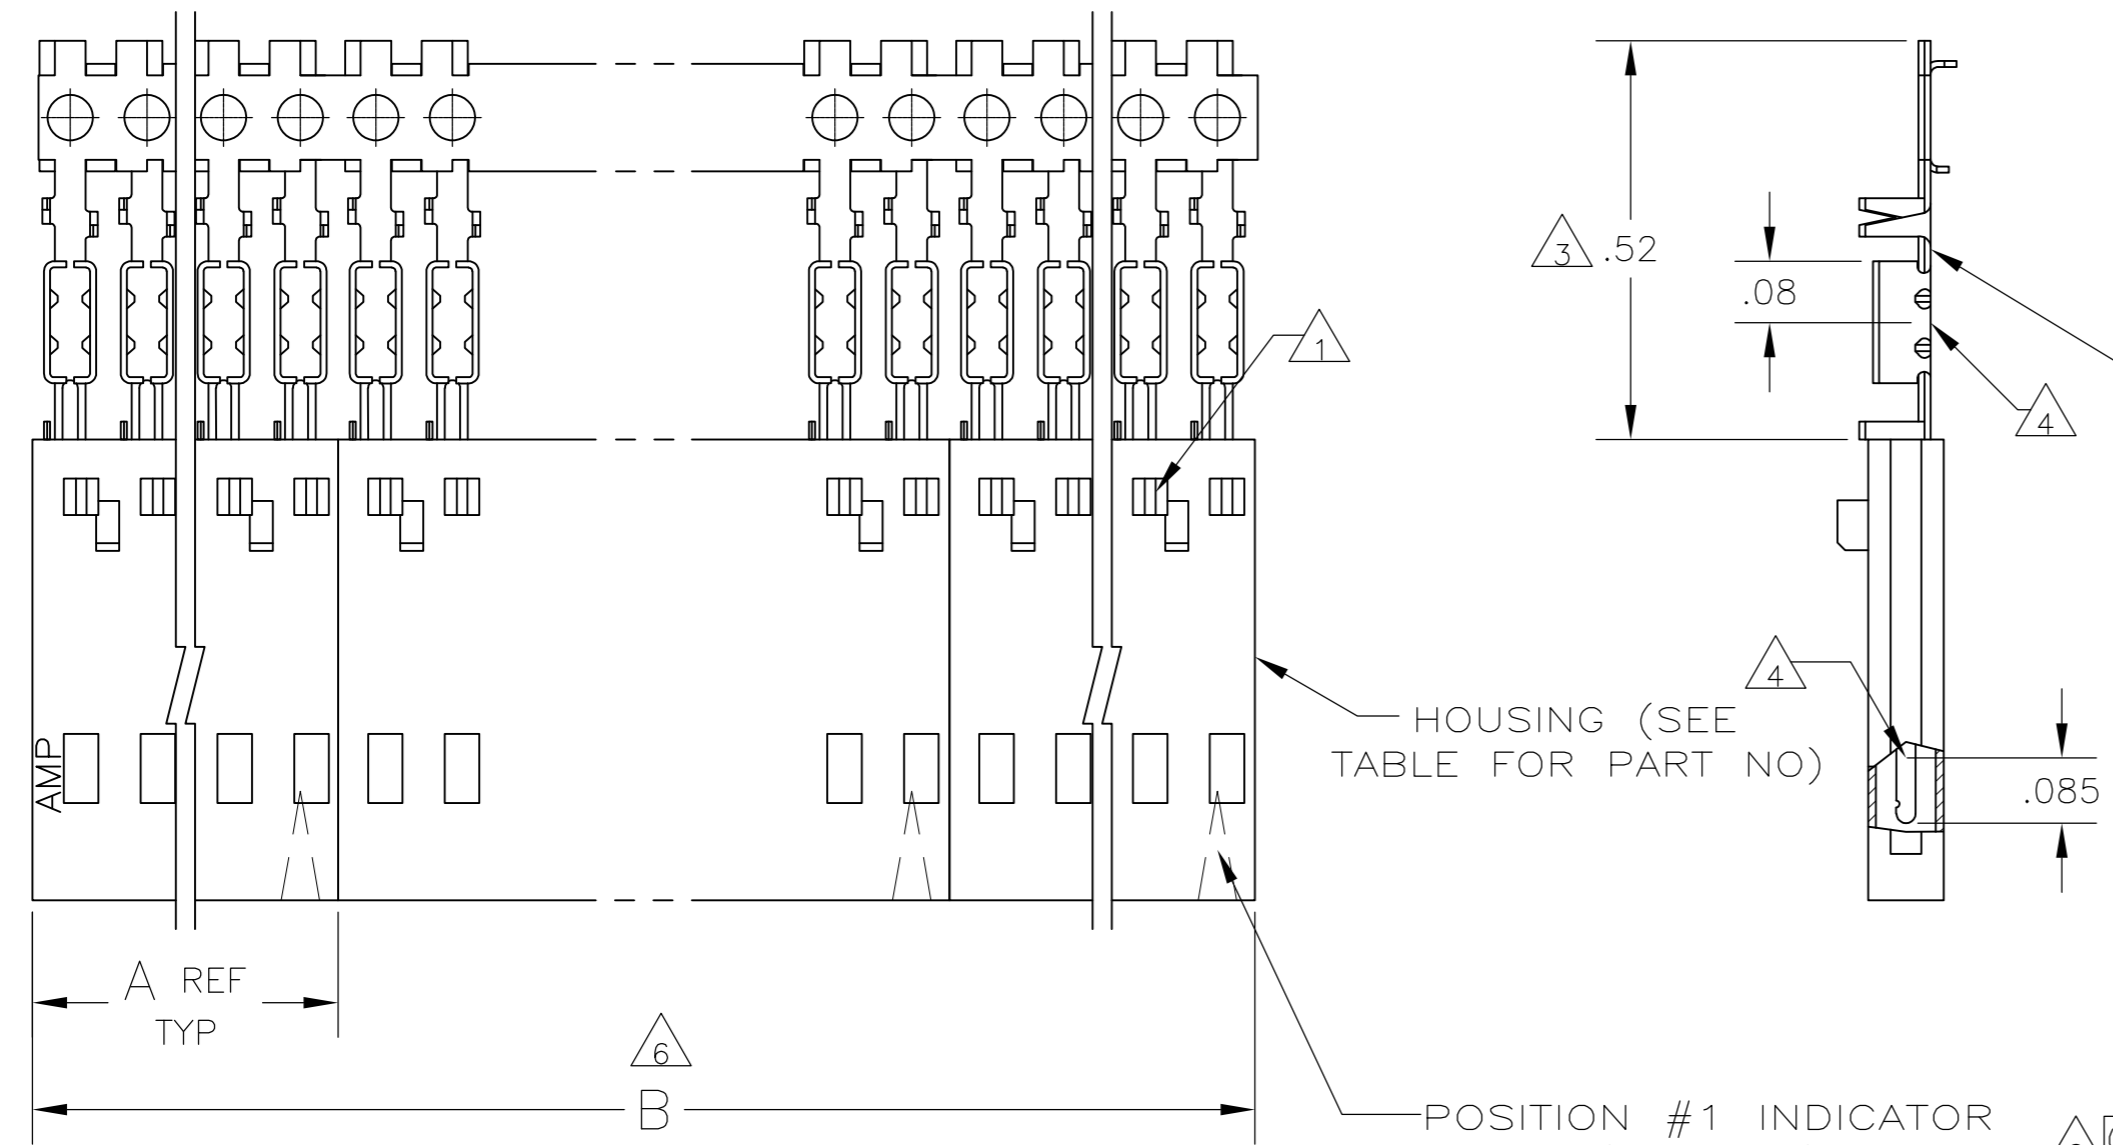

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103895
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 FINISH: PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 FINISH: PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

9	OBSOLETE	8	2	2.40	1.198	1-104503-1	12	6-103952-1
9	OBSOLETE	8	2	2.20	1.098	1-104503-0	11	6-103952-0
9	OBSOLETE	8	2	2.00	.998	104503-9	10	5-103952-9
9	OBSOLETE	8	2	1.80	.898	104503-8	9	5-103952-8
9	OBSOLETE	8	2	1.60	.798	104503-7	8	5-103952-7
9	OBSOLETE	8	2	1.40	.698	104503-6	7	5-103952-6
9	OBSOLETE	8	4	2.39	.598	104503-5	6	5-103952-5
9	OBSOLETE	8	4	1.99	.498	104503-4	5	5-103952-4
		8	5	1.99	.398	104503-3	4	5-103952-3
		8	5	1.49	.298	104503-2	3	5-103952-2
		8	10	1.98	.198	104503-1	2	5-103952-1
9	OBSOLETE	7	2	2.40	1.198	1-104503-1	12	1-103952-1
9	OBSOLETE	7	2	2.20	1.098	1-104503-0	11	1-103952-0
9	OBSOLETE	7	2	2.00	.998	104503-9	10	103952-9
9	OBSOLETE	7	2	1.80	.898	104503-8	9	103952-8
9	OBSOLETE	7	2	1.60	.798	104503-7	8	103952-7
9	OBSOLETE	7	2	1.40	.698	104503-6	7	103952-6
9	OBSOLETE	7	4	2.39	.598	104503-5	6	103952-5
9	OBSOLETE	7	4	1.99	.498	104503-4	5	103952-4
9	SUPERSEDED	7	5	1.99	.398	104503-3	4	103952-3
		7	5	1.49	.298	104503-2	3	103952-2
		7	10	1.98	.198	104503-1	2	103952-1
PLATING		6	B	A		HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: L.MAYER 5-11-86
 CHK: P.C.DEYONG 12-11-86
 APVD: P.C.DEYONG 12-11-86

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± .02
 3 PLC ± .005
 4 PLC ± -
 ANGLES ± -

FINISH: SEE TABLE

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK PINS: PHOS BRONZE

NAME: P.C.DEYONG
 PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

WEIGHT: -

CUSTOMER DRAWING

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME: PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #22-#26 AWG WIRE SIZE, STRIP FORM

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103952 RESTRICTED TO: -

SCALE: 4:1 SHEET 1 OF 1 REV M1