

FG26X7R1H684KNT00




Application

Commercial Grade

Series

FG26

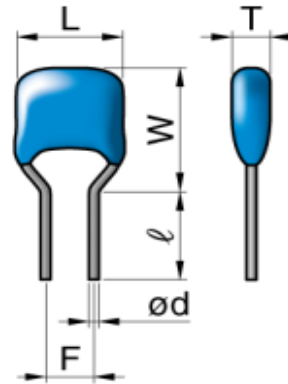

Dimensions

- L 5.5mm Max.
- W 6mm Max.
- T 3.5mm Max.
- F 5mm +/-1mm
- d 0.5mm +0.1,-0.03mm
- l 7mm +/-2mm

Temperature Characteristic

-55 to 125°C +/-15%

Rated Voltage

50Vdc

Capacitance

680nF

Capacitance Tolerance

+/-10%

Dissipation Factor





3% Max.

Insulation Resistance

735Mohm Min.

AEC-Q200

No

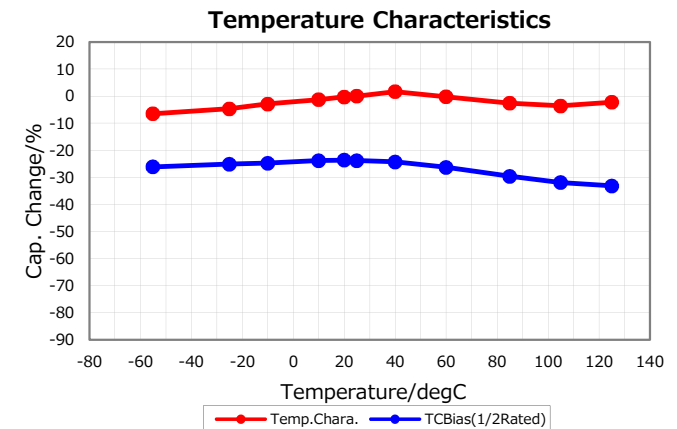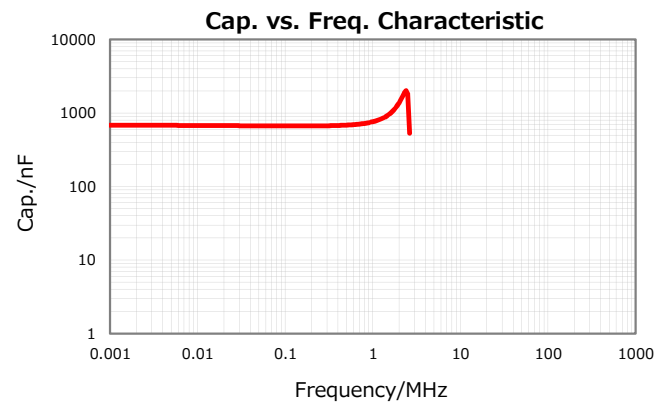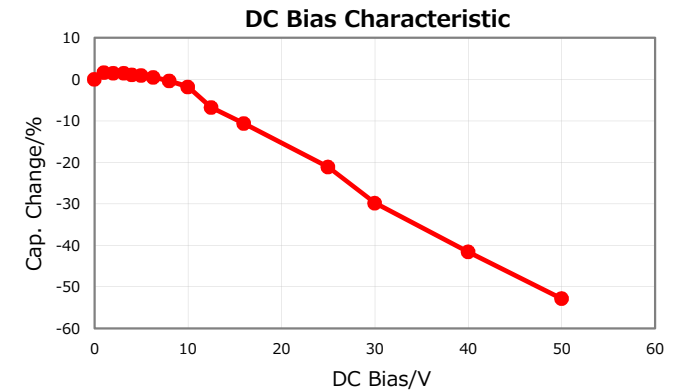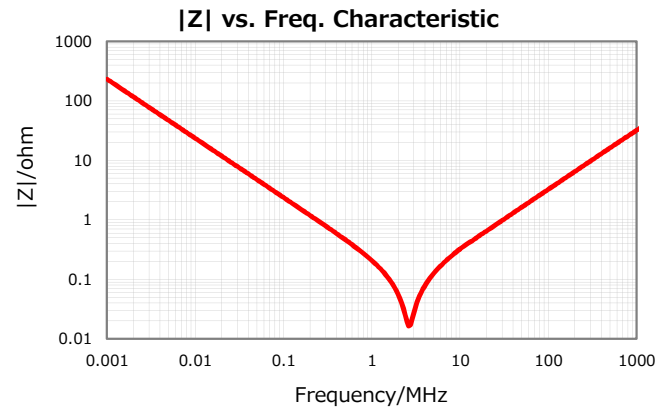

Characterization Sheet (MLCC with Dipped Radial Lead)



All specifications are subject to change without notice.

September 8, 2017