

# CGA3E2X7R2A153M080AA

TDK Item Description : CGA3E2X7R2A153MT\*\*\*\*



Equivalent C1608X7R2A153M for Automotive

## Application & Main Feature

Automotive Grade ( Mid Voltage (100 to 630V) )

## Series

CGA3(1608) [EIA CC0603]



## Dimensions

|   |                 |
|---|-----------------|
| L | 1.60mm +/-0.1mm |
| W | 0.80mm +/-0.1mm |
| T | 0.80mm +/-0.1mm |
| B | 0.20mm Min.     |
| G | 0.30mm Min.     |

## Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

## Rated Voltage

2A (100Vdc)

## Capacitance

15nF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

3% Max.


## Insulation Resistance

10Gohm Min.


## AEC-Q200

Yes


## DC Bias Characteristic

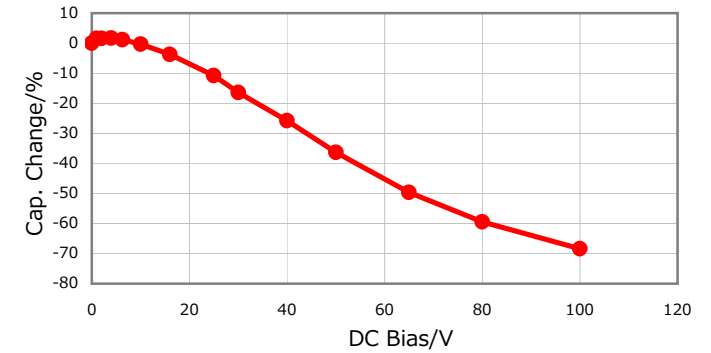


## |Z|, ESR vs. Freq. Characteristics

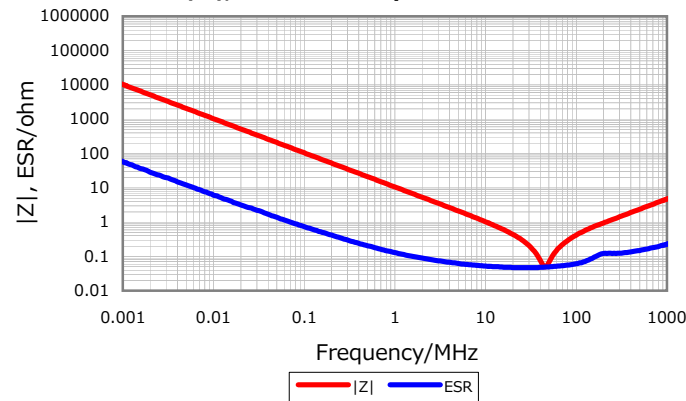


## Temperature Characteristics

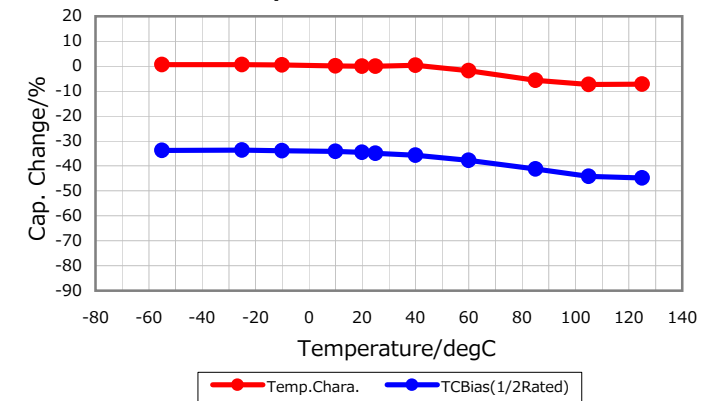

## Cap. vs. Freq. Characteristic

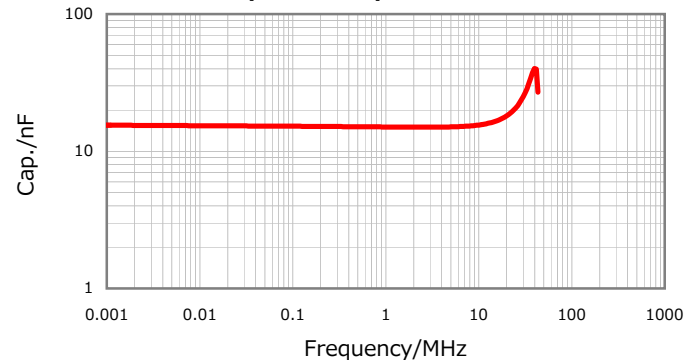

## Ripple Temperature Rise Characteristics

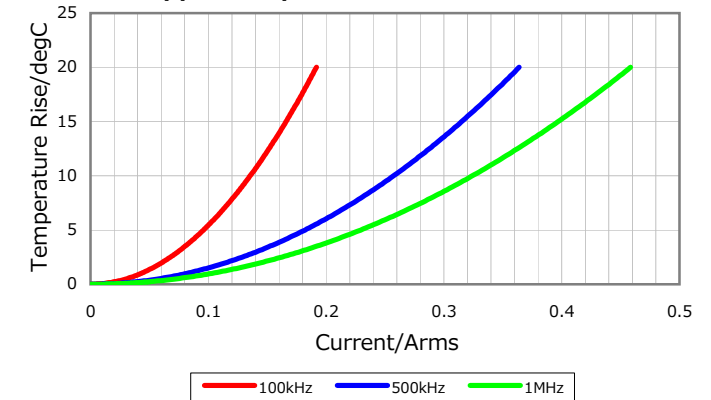

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 4, 2016