

SPECIFICATIONS





| PARAMETERS | VALUES | UNIT |
|-----------------------------|------------------------------|-------|
| RATED VOLTAGE (SQUARE WAVE) | 5 | Vp-p |
| OPERATING VOLTAGE RANGE | 3 ~ 7 | Vp-p |
| RATED CURRENT (MAX) | 70 | mA |
| COIL RESISTANCE | 32 ± 5 | OHM |
| MINIMUM SPL @ 10 CM | 87 | dB |
| RESONANT FREQUENCY | 2,300 ± 500 | Hz |
| OPERATING TEMPERATURE | -30 ~ +70 | °C |
| STORAGE TEMPERATURE | -40 ~ +80 | °C |
| HOUSING MATERIAL | LCP | - |
| TERMINAL MATERIAL | Sn PLATED PHOSPHOR BRONZE | - |
| WEIGHT | .42 | grams |

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.


REVISION HISTORY

| LTR | DESCRIPTION | DATE | APPROVED |
|-----|--|-----------|----------|
| - | RELEASED FROM ENGINEERING | 4/1/2005 | |
| A | UPDATED RoHS INFORMATION | 5/9/2005 | R.W. |
| B | REVISED TO INVENTOR 3-D DRAWING TEMPLATE | 11/1/2007 | B.R. |

A (5:1)

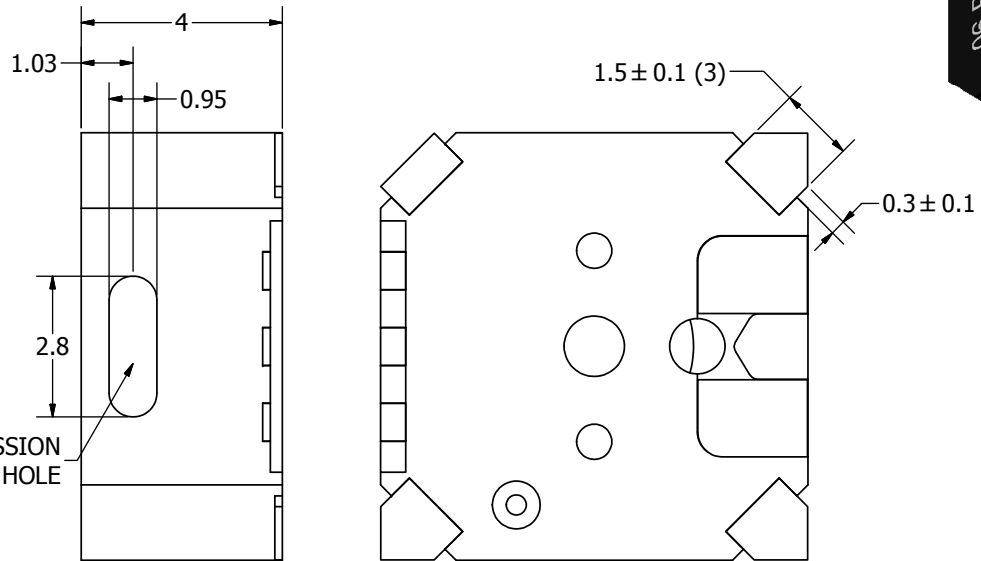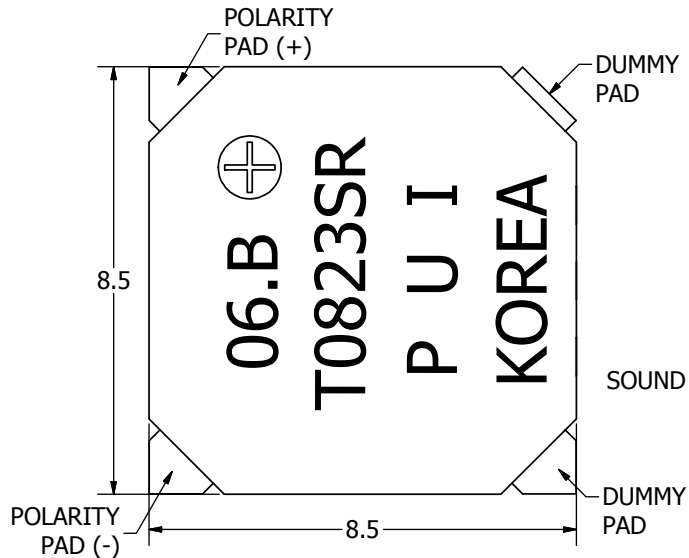

DETAIL "B"

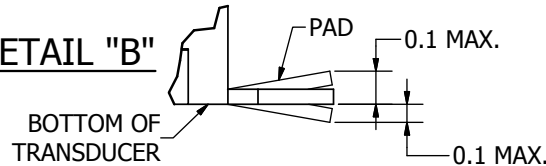

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

| | | | | | | | | |
|--|-------------------|-------------|-----------|------------|----------|---------------------|----------|------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. | SIZE A3 | Designed by | Date | Checked by | Date | Approved by | Date | Drawn Date |
| | | G.V. | 3/31/2005 | E.P. | 4/1/2005 | R.W. | 4/1/2005 | 11/1/2007 |
| SMT-0823-S-R.idw | | | | | | SMT-0823-S-R | | |
| Transducer (Electro-Mech) | | | | | | Edition | Sheet | |
| | | | | | | - | 1 / 1 | |